




## STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

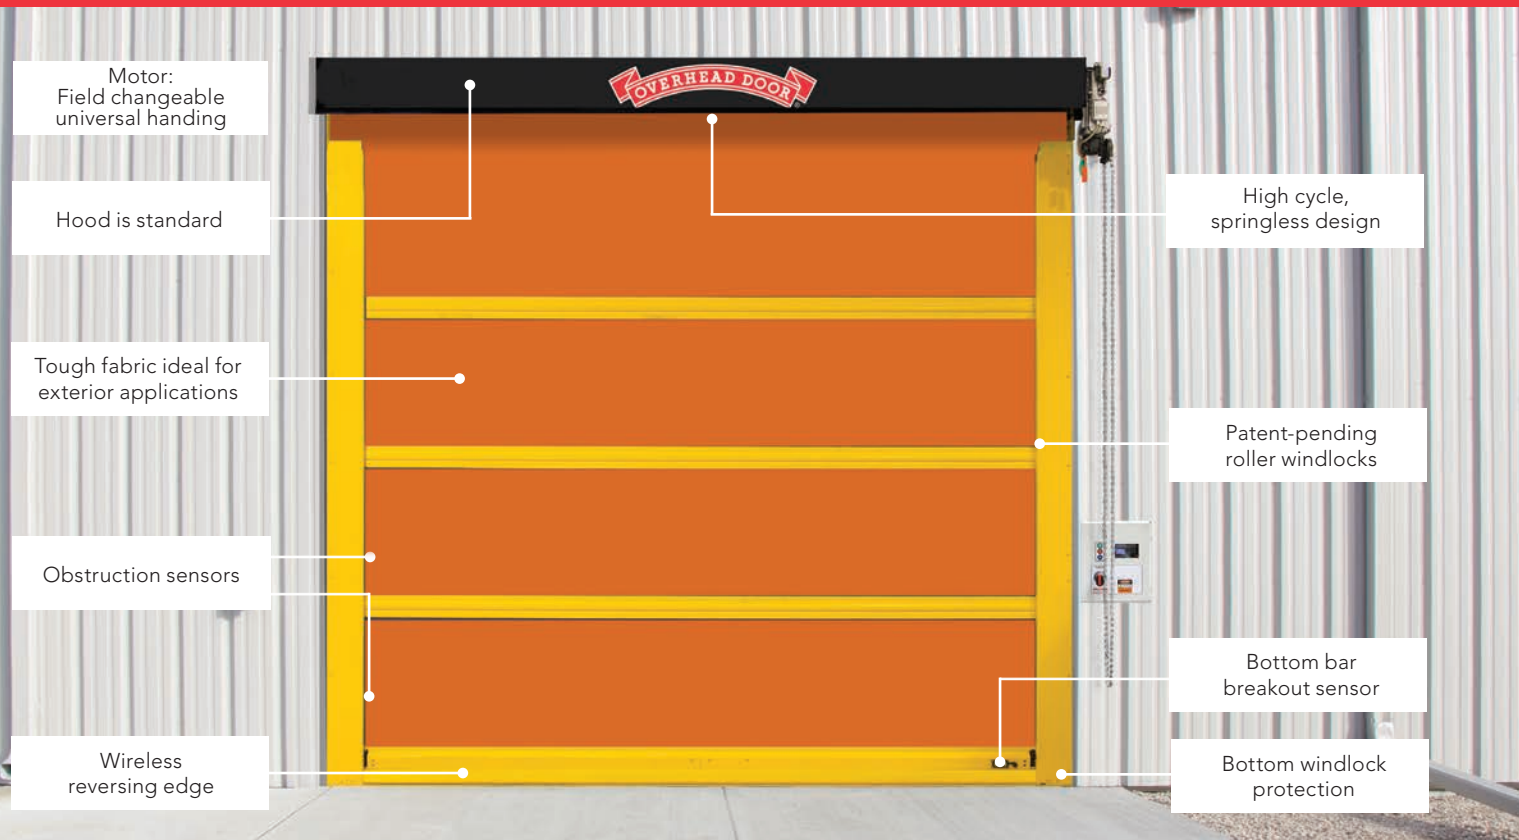

**PERFECT FOR MANUFACTURING, PARKING GARAGES, AUTO/TRANSIT, FOOD AND BEVERAGE, WAREHOUSE AND DISTRIBUTION FACILITIES**

- **Excellent wind load protection**
  - Patent-pending roller windlocks on struts
  - Bottom windlocks for pressure protection
- **Patent-pending breakaway tabs**
  - Impact protection while raising door
- **Engineered for high cycles**
  - Springless design for minimal maintenance
  - Direct-mounted gear drive minimizes wear and tear
  - Variable frequency drive eliminates sudden jolts from door start/stop
- **Rugged 3-ply fabric curtain construction**
- **Low maintenance**
  - Push button self-repair
  - Plug and play wiring
- **Optional programmable LED lighting system**
- **Standard hood** blocks moisture and debris from impeding door operation



INDUSTRY LEADING  
COMMERCIAL & INDUSTRIAL SOLUTIONS

# MODEL 993 STRUTTED EXTERIOR HEAVY-DUTY HIGH SPEED FABRIC DOOR

## Standard features at a glance

Maximum width	20'
Maximum height	20'
Maximum opening speed	Up to 65"/sec
Maximum closing speed	Up to 40"/sec
Bottom bar breakaway	Yes
Wind load*	Up to 19.5 psf
Wind struts	Metal struts with roller windlocks
Curtain material	3 layers of PVC-coated polyester with 2 layers of polyester weave
Header braces	Multiple braces across entire width strengthen and combat sagging
Operation	Direct drive motor and gearbox system with field changeable universal handing and door stop safety device
Hood	Protection from debris and moisture
Control panel	Variable frequency drive NEMA 4X cULus listed; Onboard self diagnostic and service reminder; Built-in padlockable fused disconnect
Obstruction safety detection	Infrared sensors mounted in-plane to the door curtain at 18" and 50" - 54" from floor
Reversing safety edge	Wireless reversing edge
Available supply voltages**	110-120V AC 1 PH, 190-207V AC 1PH <sup>†</sup> , 208-245V AC 1PH, 190-207V AC 3PH <sup>†</sup> , 208-245V AC 3PH, 456-495V AC 3PH, 575V 3PH <sup>†</sup> ( <sup>†</sup> requires stand-alone mounted transformer)
Hinged guides	Provide easy access for maintenance
Warranty	5-Year Limited

## Options

- **Actuation options** – Push button, key switch, pull switch, loop detector, motion detector, treadle switch, radio control. Wireless options available
- **Signaling device options** – Red/green LED warning light, horn/strobe combination, rotating warning light
- **Programmable LED lighting system** – 3' tall light bar with red, yellow, green lighting
- **Sloped hood and non-drive end cover** – protection from debris and moisture
- **20" high vision panels** – spaced evenly across width of door


## Curtain color options



Orange



Red



Gray



Blue




Standard color for guides, wind strut and bottom bar is yellow. Approximately 200 optional RAL powder coat colors are also available.

Actual colors may vary from brochure due to fluctuation in the printing process. **Always request a color sample from your Overhead Door™ Distributor for accurate color matching.**

\* Wind load is the ultimate pressure tested at door width of 20'.

\*\* Single phase available up to 10'x10' doors.



Articulating roller wind strut



Bottom windlock strut



INDUSTRY LEADING  
COMMERCIAL & INDUSTRIAL SOLUTIONS

2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067

1-800-929-DOOR • sales@overheaddoor.com

overheaddoor.com

